

# CV-54R

## HDMI Extender over Single Coax with Bi-directional IR

### User Manual



rev: 131224  
Made in Taiwan



## Safety and Notice

The **CV-54R HDMI Extender over Single Coax with Bi-directional IR** has been tested for conformance to safety regulations and requirements, and has been certified for international use. However, like all electronic equipments, the **CV-54R** should be used with care. Please read and follow the safety instructions to protect yourself from possible injury and to minimize the risk of damage to the unit.

- Follow all instructions and warnings marked on this unit.
- Do not attempt to service this unit yourself, except where explained in this manual.
- Provide proper ventilation and air circulation and do not use near water.
- Keep objects that might damage the device and assure that the placement of this unit is on a stable surface.
- Use only the power adapter and power cords and connection cables designed for this unit.
- Do not use liquid or aerosol cleaners to clean this unit. Always unplug the power to the device before cleaning.



### TABLE OF CONTENTS

INTRODUCTION.....	1
FEATURES .....	1
PACKAGE CONTENTS.....	1
SPECIFICATIONS .....	2
PANEL DESCRIPTIONS .....	3
Transmitting unit ▶ CV-54R-TX.....	3
Receiving unit ▶ CV-54R-RX.....	4
EDID LEARNING .....	5
CONNECTION DIAGRAM.....	5
EYE PATTERN .....	6
HDMI PIN DEFINITION .....	7
NOTICE.....	7
WARRANTY.....	8

# INTRODUCTION

The **CV-54R HDMI Extender over Single Coax with Bi-directional IR** boosts up your HDMI transmission range up to 120m (394ft) in HDTV 1080p format through single coaxial cable. CV-54R is easy to install and works perfectly with Belden 1694A coaxial cables. Other coaxial cables can also work with CV-54R and the transmission distance depends upon the quality and bandwidth of coaxial cables. In addition, CV-54R is also equipped with bi-directional IR pass-through path. This bonus feature allows users to rely on the same coax cable to have IR control on IR equipped devices, such as TV and BD players, and CV-54R makes IR control possible through only single coax cable along with high quality HDMI A/V signals.

The CV-54R includes two units: transmitting (CV-54R[TX]) and receiving (CV-54R[RX]) units. The transmitting unit is used to capture the HDMI and HDCP input signals and carry the signals through only coaxial cable. The receiving unit is responsible for auto equalizing the transmitted HDMI multimedia data. The transmission range between the sending and receiving units can be up to 120m (394ft) under Full HD (1080p) with 7.1 channel audio.

## FEATURES

- HDCP compliant
- Single coaxial cable
- 7.1-channel audio supported
- Extends the transmission range up to RG6-120m(394ft) from the HDMI sources under Full HD resolution (1080p60 24-bit color depth) through Belden 1694A coaxial cable.
- Extends the transmission range up to RG59/U-70m(230ft) from the HDMI sources under Full HD resolution (1080p60 24-bit color depth) through RG59/U-3GHz solid coaxial cable.
- Video resolutions support 480i, 576i, 720p, 1080i, and 1080p
- Bi-directional IR path
- Wall mounting housing design for easy and robust installation



The length depends on the characteristics and quality of the coax cables. Higher resolutions and longer transmission distances require low skew cables for best performance. Solid and shielded coax cable such as Belden 1694A with metal 75ΩBNC connectors is recommended.

## PACKAGE CONTENTS

- 1x CV-54R [TX & RX]
- 1x IR receiver
- 1x User Manual
- 1x IR blaster
- 2x DC 5V 2A wall wart

# SPECIFICATIONS

Model Name	CV-54R	
Technical	CV-54R[Tx]	CV-54R[Rx]
Role of usage	Transmitter [TX]	Receiver [RX]
HDMI compliance	HDMI Deep Color	
HDCP compliance	Yes	
Video bandwidth	Single-link 225MHz [6.75Gbps]	
Video support	480i / 720p / 1080i / 1080p60 (Does NOT support 480p)	
Audio support	Surround sound (up to 7.1ch) or stereo digital audio	
HDMI over Coax transmission range	Full HD [1080p 24-bit color] – up to 120m [394ft]	
HDMI Equalization	Auto	
Input TMDS signal	1.2 Volts [peak-to-peak]	
Input DDC signal	5 Volts [peak-to-peak, TTL]	
ESD protection	[1] Human body — ±19kV [air-gap discharge] & ±12kV [contact discharge] [2] Core chipset — ±4kV	
PCB stack-up	6-layer board [impedance control — differential 100Ω; single 50Ω]	
Input	1x HDMI 1x IR socket	1x BNC 1x IR socket
Output	1x BNC 1x IR socket	1x HDMI 1x IR socket
IR remote control	Electro-optical characteristics: $\pi = 25^\circ$ / Carrier frequency: 20-60kHz	
HDMI connector	Type A [19-pin female]	
BNC connector	75Ω interlocking socket	
3.5mm connector	3.5mm earphone jack for IR blaster to control HDMI source device	
Mechanical		
Housing	Metal enclosure	
Dimensions [L x W x H]	Model	79 x 84 x 27mm [3.1" x 3.3" x 1"]
	Package	175 x 270 x 80mm [6.9" x 10.4" x 3.1"]
	Carton	370 x 450 x 300mm [1.3" x 1.6" x 1"]
Weight	Model	250g [8.8oz]
	Package	622g [1.37 lbs]
Fixedness	Interlocking power supply	
Power supply	5V 2A DC	
Power consumption	6 Watt [max]	
Operation temperature	0~40°C [32~104°F]	
Storage temperature	-20~60°C [-4~140°F]	
Relative humidity	20~90% RH [no condensation]	

# PANEL DESCRIPTIONS

## Transmitting unit ▶ CV-54R-TX

### Front Panel




1. **COAX OUT:** Connects to a high standard coaxial cable here
2. **IR Blaster:** Infrared 3.5mm socket for plugging in the extension cable of IR blaster
3. **IR Receiver:** Infrared 3.5mm socket for plugging in the extension cable of IR receiver
4. **MODE:** Please see table below for detail information

Pin #1	Pin #2	EDID feature
OFF (↑)	OFF (↑)	3G/HD/SD-SDI with multi-channel audio except DTS-HD Master & Dolby TrueHD
OFF (↑)	ON (↓)	3G/HD/SD-SDI With stereo PCM audio
ON (↓)	OFF (↑)	HD/SD-SDI With stereo PCM audio
ON (↓)	ON (↓)	EDID Learning Mode

Factory default: OFF-OFF [↑-↑]


### Rear Panel

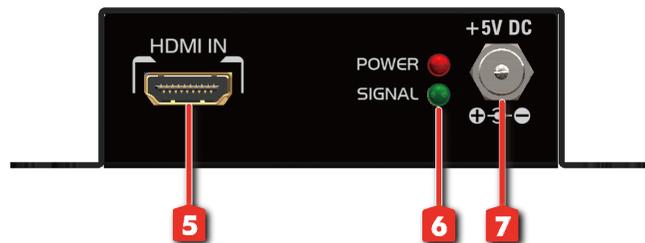

5. **HDMI IN:** Connects to a HDMI source device with a HDMI male-to-male cable here
6. **POWER/SIGNAL LED:** Red light - POWER; Green light - SIGNAL ACTIVE
7. **+5V DC:** Connects to 5V DC power supply


## Receiving unit ▶ CV-54R-RX

### Front Panel

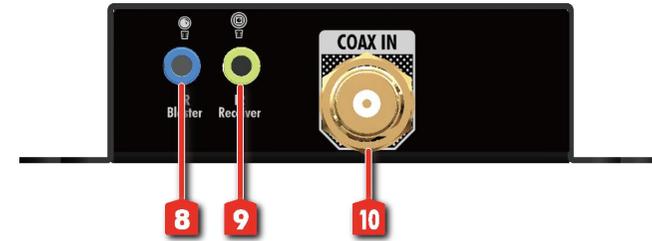

8. **IR Blaster:** Infrared 3.5mm socket for plugging in the extension cable of IR blaster
9. **IR Receiver:** Infrared 3.5mm socket for plugging in the extension cable of IR receiver
10. **COAX IN:** Connect to a high standard coaxial cable here


### Rear Panel

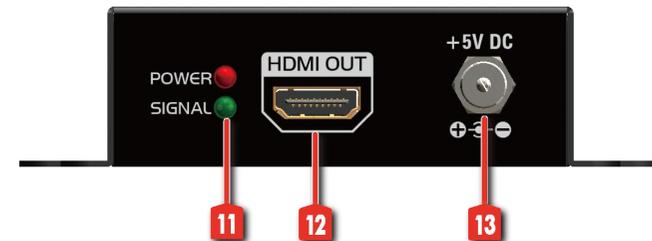


11. **POWER/SIGNAL LED:** Red light - POWER; Green light - SIGNAL ACTIVE
12. **HDMI OUT:** Connects to a HDMI display with a HDMI male-male cable here
13. **+5V DC:** Connects to a 5V DC power supply unit

1. Please make sure the Pin #1 - Pin #2 of DIP switch is at On-On [↕↕].
2. Connect the HDMI display to the HDMI port of TX.
3. Power on TX.
4. The green LED in the transmitting module will light up indicating the EDID learning procedure is complete.
5. Please DO NOT change the DIP switch, otherwise the built-in EDID Learning information will be lost.

## CONNECTION DIAGRAM

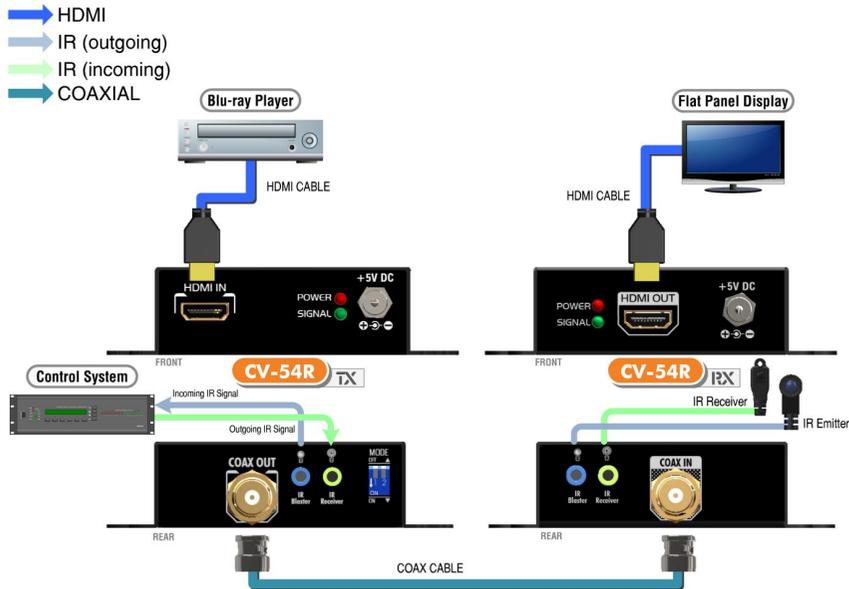

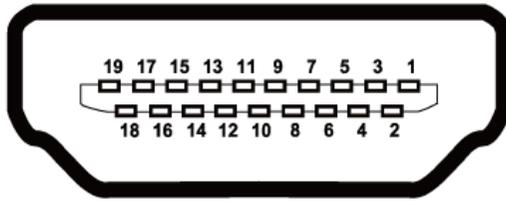

Type A (Receptacle) HDMI

Pin 1	TMDS Data2+	Pin 11	TMDS Clock Shield
Pin 2	TMDS Data2 Shield	Pin 12	TMDS Clock-
Pin 3	TMDS Data2-	Pin 13	NC
Pin 4	TMDS Data1+	Pin 14	Reserved (N.C. on device)
Pin 5	TMDS Data1 Shield	Pin 15	SCL
Pin 6	TMDS Data1-	Pin 16	SDA
Pin 7	TMDS Data0+	Pin 17	DDC/CEC Ground
Pin 8	TMDS Data0 Shield	Pin 18	+5V Power
Pin 9	TMDS Data0-	Pin 19	Hot Plug Detect
Pin 10	TMDS Clock+		

The SELLER warrants the **CV-54R HDMI Extender over Single Coax with Bi-directional IR** free from defects in the material and workmanship for 1 year from the date of purchase from the SELLER or an authorized dealer. Should this product fail to be in good working order within 1 year warranty period, The SELLER, at its option, repair or replace the unit, provided that the unit has not been subjected to accident, disaster, abuse or any unauthorized modifications including static discharge and power surge. This warranty is offered by the SELLER for its BUYER with direct transaction only. This warranty is void if the warranty seal on the metal housing is broken.

Unit that fails under conditions other than those covered will be repaired at the current price of parts and labor in effect at the time of repair. Such repairs are warranted for 90 days from the day of reshipment to the BUYER. If the unit is delivered by mail, customers agree to insure the unit or assume the risk of loss or damage in transit. Under no circumstances will a unit be accepted without a return authorization number.

The warranty is in lieu of all other warranties expressed or implied, including without limitations, any other implied warranty or fitness or merchantability for any particular purpose, all of which are expressly disclaimed.

Proof of sale may be required in order to claim warranty. Customers outside Taiwan are responsible for shipping charges to and from the SELLER. Cables and power adapters are limited to a 30 day warranty and must be free from any markings, scratches, and neatly coiled.

The content of this manual has been carefully checked and is believed to be accurate. However, The SELLER assumes no responsibility for any inaccuracies that may be contained in this manual. The SELLER will NOT be liable for direct, indirect, incidental, special, or consequential damages resulting from any defect or omission in this manual, even if advised of the possibility of such damages. **Also, the technical information contained herein regarding the CV-54R features and specifications is subject to change without further notice.**

## NOTICE

Since CV-54R is sensitive to the HDMI source's input jitters, the input HDMI signals with larger jitters will shorten the transmission distance hugely, especially for full HD 1080p@60!

1. The lab testing result shows that Belden 1694A coaxial cables can transmit HDMI signals up to 120m (394ft).
2. If your HDMI display has multiple HDMI inputs, it is found that the first HDMI input [HDMI input #1] generally can produce better transmission performance among all HDMI inputs.
3. Please noticed that audio must be 48KHz and 480p is not supported.