


CV-147

DVI over Single CAT5 Direct Plug-in Extender

User Manual

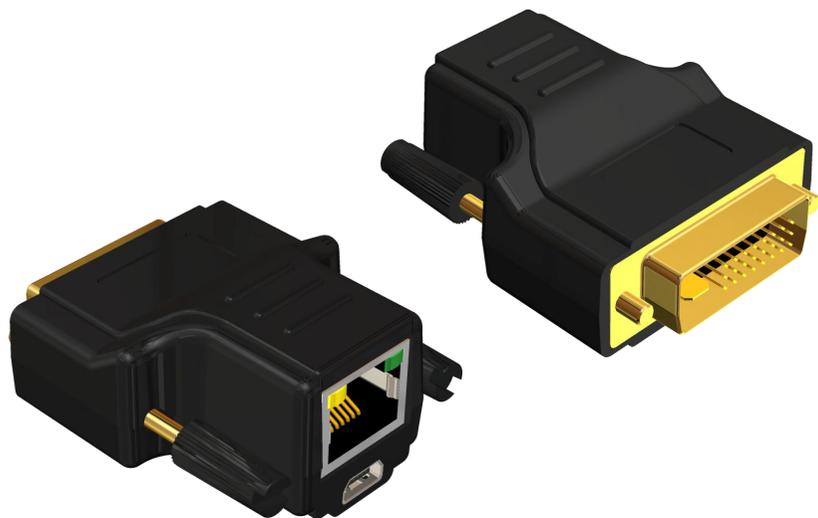

Safety and Notice

The **CV-147 DVI over Single CAT5 Direct Plug-in Extender** has been tested for conformance to safety regulations and requirements, and has been certified for international use. However, like all electronic equipments, the CV-147 should be used with care. Please read and follow the safety instructions to protect yourself from possible injury and to minimize the risk of damage to the unit.

- Follow all instructions and warnings marked on this unit.
- Do not attempt to service this unit yourself, except where explained in this manual.
- Provide proper ventilation and air circulation and do not use near water.
- Keep objects that might damage the device and assure that the placement of this unit is on a stable surface.
- Use only the power adapter and power cords and connection cables designed for this unit.
- Do not use liquid or aerosol cleaners to clean this unit. Always unplug the power to the device before cleaning.



TABLE OF CONTENTS

INTRODUCTION.....	1
FEATURES	1
PACKAGE CONTENTS.....	1
SPECIFICATIONS.....	2
HADWARE INSTALLATION.....	3
CONNECTION DIAGRAM.....	3
DVI OVER SINGLE CAT5 SERIES LINEUP	4
NOTICE.....	5
WARRANTY.....	6



rev: 131002
Made in Taiwan

INTRODUCTION

The **CV-147 DVI over Single CAT5 Direct Plug-in Extender** extends your PC DVI transmission distance up to 60m (200ft) with resolution 1024x768 @60Hz. With CV-147, users can transmit high quality digital video of PC applications through one cost effective CAT-5/5e LAN cable to the remote monitor or projector, instead of using short and expensive DVI cables. With embedded EDID inside the extender, your PC will continue to send the digital video even when the monitor is not connected. The user can then disconnects the monitor, place it in a remote location and reconnect it without rebooting the operating system.

The CV-147 includes two identical units: transmitting and receiving units. The transmitting unit is connected to your PC DVI output and the receiving unit is connected to the monitor or projector. While successfully connected, the two LED lights on each RJ-45 connector will blink. The transmission distance between the transmitting and receiving units can be up to 60m (200ft) under XGA (1024x768@60Hz) or 25m (80ft) under UXGA (1920x1200@60Hz). With compact size and requiring no power, CV-147 is the most cost effective choice for bringing your impressive digital video to the remote display.

FEATURES

- DVI 1.1 compliant
- Extend the transmission length from the sources up to 60m (200ft) under XGA (1024x768@60Hz) or 25m (80ft) under UXGA (1920x1200@60Hz)1
- Identical units work at both transmitting and receiving end. Easy to install.
- No external power required
- Spare mini USB +5V power socket2
- Compact size
- Direct plug-in
- Perfectly integrated with other DVI over CAT5 series products

1

1. The length depends on the characteristics and quality of the cables. Higher resolutions and longer transmission distances require low skew cables (<25ns/100m) for best performance. Unshielded CAT6 with metal RJ-45 connectors is recommended.
2. From time to time, there might not be enough current CV-147 can extract from DVI +5V pin! When users encounter such a situation, LED not blinking, one typical Type A USB to mini USB cable can help to solve this under power issue instantly!

PACKAGE CONTENTS

- 2x CV-147
- 1x User Manual

SPECIFICATIONS

Model Name	CV-147	
Technical	CV-147-TX	CV-147-RX
Role of usage	Transmitter [TX]	Receiver [RX]
DVI compliance	DVI 1.1	
HDCP compliance	No	
Video bandwidth	Single-link 165MHz [4.95Gbps]	
Video support	Up to WUXGA [1920x1200@60Hz] & UXGA [1600x1200@60Hz]	
Transmission over CAT5e	1920x1200@60Hz – 25m [80ft] 1024x768@60Hz – 60m [200ft]	
Audio support	No audio for DVI signal	
Equalization	None	
Input TMDS signal	1.2 Volts [peak-to-peak]	
Input DDC signal	5 Volts [peak-to-peak, TTL]	
Spare USB power jack	No	Yes
PCB stack-up	4-layer board [impedance control — differential 100Ω; single 50Ω]	
Input	1x DVI	1x RJ-45
Output	1x RJ-45	1x DVI
DVI connector	DVI-I [29-pin male digital only]	
RJ-45 connector	WE/SS 8P8C with 2 LED indicators	
USB connector	No	mini USB
Mechanical	CV-147	
Housing	Plastic mold	
Dimensions [L x W x H]	Model	[TX/RX] 50x40x20mm [2" x 1.6" x 0.8"]
	Package	170 x 115 x 40mm [6.7" x 4.5" x 1.6"]
	Carton	450 x 370 x 300mm [1'6" x 1'3" x 11.8"]
Weight	Model	[TX] –50g [1.8 oz]
	Package	184g [6.1 oz]
Fixedness	Direct plug-in	
Power supply	Mini USB for RX	
Power consumption	0.5 Watt [max]	
Operation temperature	0~40°C [32~104°F]	
Storage temperature	-20~60°C [-4~140°F]	
Relative humidity	20~90% RH [no condensation]	


HADWARE INSTALLATION

1. Connect CV-147-TX to your DVI source.
2. Connect CV-147-RX to your DVI display.
3. Make sure the LED blink on source and display sites! If not, please try to have enough power through USB socket on CV-147 RX!
4. Make sure the CAT-5/5e/6 cable is tightly connected between the DVI source and the display with the CV-147.
5. The installation is done.

DVI OVER SINGLE CAT5 SERIES LINEUP

	CV-15	CV-17	CV-117	CV-127	CV-137	CV-147
Output to display	HDMI	DVI	DVI	DVI	DVI	DVI
Transmission over CAT5 at 1024x768@60Hz	25m [80ft]	60m [200ft]	25m [80ft]	25m [80ft]	25m [80ft]	60m [200ft]
Transmission over CAT5 at 1920x1200@60Hz	15m [50ft]	40m [130ft]	15m [50ft]	15m [50ft]	15m [50ft]	25m [80ft]
Power requirement	No	TX-No / RX-Yes	No	No	N/A ³	N/A ³
Equalization	No	Yes	No	No	No	No
EDID learning	No	Yes	No	Yes	No	No

CONNECTION DIAGRAM

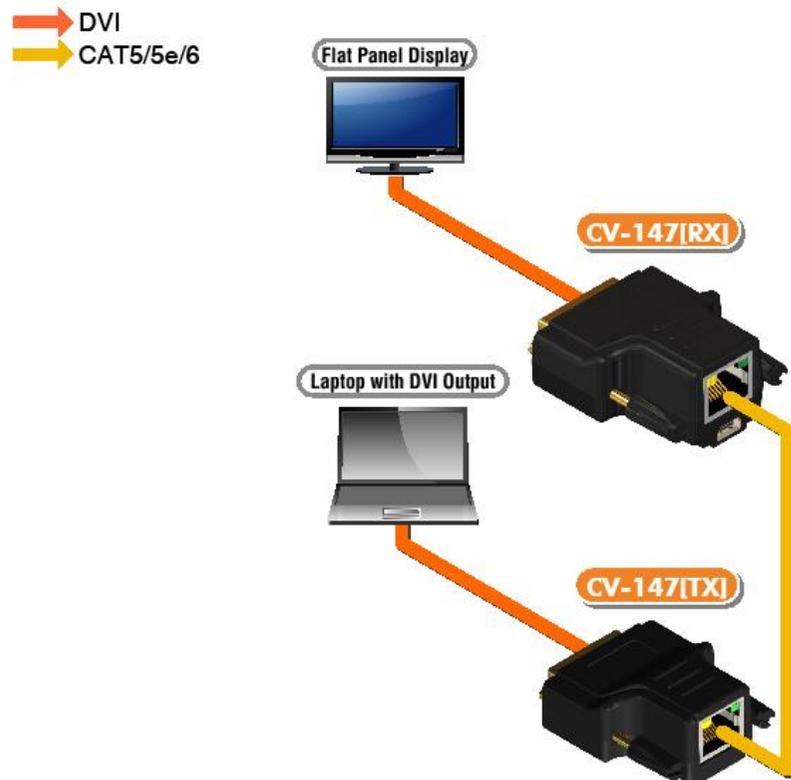

i 1. Most of the time, power will be unnecessary for CV-147, and it behaves exactly like its sister model CV-117! However, when encountering not enough current or voltage from DVI connection, CV-147 offers another path, USB, to compensate the deficiency of power supply!

1. The CV-147 may not be compatible with the DVI sources and displays that feature resolutions not in the aspect ratio of 4:3, 16:9 and 16:10.
2. All DVI over CAT5 transmission distances are measured using Belden 1583A CAT5e 125MHz UTP cable and ASTRODESIGN Video Signal Generator VG-859C.
3. The transmission length is largely affected by the type of Cat-5/5e/6 cables, the type of HDMI sources, and the type of HDMI display. The testing result shows solid UTP cables (usually in the form of 300m [1,000ft] bulk cables) can transmit a lot longer signals than stranded UTP cables (usually in the form of fixed length patch cords). Shielded STP cables are better suited than unshielded UTP cables. A solid UTP Cat-5e cable shows longer transmission range than stranded STP Cat-6 cable. For long extension applications, solid UTP/STP cables are the only viable choice.
4. EIA/TIA-568-B termination (T568B) for Cat-5/5e/6 cables is recommended for better performance.
5. To reduce the interference among the unshielded twisted pairs of wires in Cat-5/5e/6 cable, one can use shielded STP cables to improve EMI problems, which is worsen in long transmission.
6. Because the quality of the CAT5/6 cables has the major effect on how long the transmission limit can achieve and how good is the received picture quality, the actual transmission range is subject to one's choice of Cat-5/5e/6 cables. For desired resolutions greater than 1080i or 1280x1024, a Cat-6 cable is recommended.



Performance Guide for HDMI over Category Cable Transmission

Performance rating		Type of category cable		
Wiring	Shielding	CAT5	CAT5e	CAT6
Solid	Unshielded (UTP)	★★★	★★★★	★★★★★
	Shielded (STP)	★★★	★★★	★★★★★
Stranded	Unshielded (UTP)	★	★★	★★
	Shielded (STP)	★	★	★★
Termination		Please use EIA/TIA-568-B termination (T568B) at any time		

The SELLER warrants the **CV-147 DVI over Single CAT5 Direct Plug-in Extender** to be free from defects in the material and workmanship for 1 year from the date of purchase from the SELLER or an authorized dealer. Should this product fail to be in good working order within 1 year warranty period, The SELLER, at its option, repair or replace the unit, provided that the unit has not been subjected to accident, disaster, abuse or any unauthorized modifications including static discharge and power surge. This warranty is offered by the SELLER for its BUYER with direct transaction only. This warranty is void if the warranty seal on the metal housing is broken.

Unit that fails under conditions other than those covered will be repaired at the current price of parts and labor in effect at the time of repair. Such repairs are warranted for 90 days from the day of reshipment to the BUYER. If the unit is delivered by mail, customers agree to insure the unit or assume the risk of loss or damage in transit. Under no circumstances will a unit be accepted without a return authorization number.

The warranty is in lieu of all other warranties expressed or implied, including without limitations, any other implied warranty or fitness or merchantability for any particular purpose, all of which are expressly disclaimed.

Proof of sale may be required in order to claim warranty. Customers outside Taiwan are responsible for shipping charges to and from the SELLER. Cables and power adapters are limited to a 30 day warranty and must be free from any markings, scratches, and neatly coiled.

The content of this manual has been carefully checked and is believed to be accurate. However, The SELLER assumes no responsibility for any inaccuracies that may be contained in this manual. The SELLER will NOT be liable for direct, indirect, incidental, special, or consequential damages resulting from any defect or omission in this manual, even if advised of the possibility of such damages. Also, the technical information contained herein regarding the **CV-147** features and specifications is subject to change without further notice.