

CV-35A

3G/HD/SD-SDI to HDMI Converter with Audio Extractor

User Manual



3G-HD-SD HDMI™
HIGH-DEFINITION MULTIMEDIA INTERFACE

Full HD
1080

7.1 CH
AUDIO

 **x.v.Color**



rev: 180607
Made in Taiwan



Safety and Notice

The **CV-35A 3G/HD/SD-SDI to HDMI Converter with Audio Extractor** has been tested for conformance to safety regulations and requirements, and has been certified for international use. However, like all electronic equipment, the **CV-35A** should be used with care. Please read and follow the safety instructions to protect yourself from possible injury and to minimize the risk of damage to the unit.

- Follow all instructions and warnings marked on this unit.
- Do not attempt to service this unit yourself, except where explained in this manual.
- Provide proper ventilation and air circulation and do not use near water.
- Keep objects that might damage the device and assure that the placement of this unit is on a stable surface.
- Use only the power adapter and power cords and connection cables designed for this unit.
- Do not use liquid or aerosol cleaners to clean this unit. Always unplug the power to the device before cleaning.



TABLE OF CONTENTS

INTRODUCTION.....	1
FEATURES	1
SPECIFICATIONS	2
PACKAGE CONTENTS.....	錯誤! 尚未定義書籤。
SUPPORTED RESOLUTIONS.....	5
PANEL DESCRIPTION	錯誤! 尚未定義書籤。
LIMITED WARRANTY	6

INTRODUCTION

The **CV-35A 3G/HD/SD-SDI to HDMI Converter with Audio Extractor** provides a cost effective way to convert 3G/HD/SD-SDI signal to HDMI compliant format. The conversion between SDI and HDMI is pure digital and guarantees no loss transformation for both audio and video. Plus, with up to 8 channels audio support, 7.1 channel or 5.1 channel audio becomes available. The CV-35A also provides one low jitter SDI local loop-out and high quality analog stereo output to provide the flexibility to users. With the use of CV-35A, the most popular uncompressed video interface in the consumer world is readily available for professional SDI equipment!

FEATURES

- Supported high-definition (HD) formats:
NTSC 525@59.94, PAL 625@50, 720p@50, 720p@59.94, 720p@60, 1080i@50, 1080i@59.94, 1080i@60, 1080p@23.97, 1080p@24, 1080p@25, 1080p@29.97, 1080p@30, 1080p@50, 1080p@59.94, 1080p@60
Bit Rate: 2.97 Gbps, 2.967 Gbps, 1.485 Gbps, 1.4835 Gbps, 270 Mbps
- Auto 3G/HD/SD-SDI detection
- Supports HDMI Deep Color
- Supports stereo audio output
- One SDI compliant output and one HDMI compliant output

PACKAGE CONTENTS


- 1x CV-35A
- 1x 5V/2A power adapter
- 1x User Manual

SPECIFICATIONS

Model Name		CV-35A
Technical		
SDI standards		3G-SDI & HD-SDI & SD-SDI
HDMI standards		HDMI 1.3
Auto 3G/HD/SD-SDI detection		Yes
Video bandwidth		[SDI][2.97Gpbs & 2.975/1.001Gpbs] [HDMI] [6.75Gpbs]
Video support		[3G] 1080p50/59.94/60 (4:2:2) [HD] – 720p @50/59.94/60Hz, 1080i @50/59.94/60Hz, 1080p @23.98/24/25/29.97/30Hz [SD] – NTSC @59.94Hz, PAL @50Hz [HDMI] up to 1080p60
Input signal		1x SDI
Output signal		1x HDMI + 1x SDI +1x 3.5mm(Audio)
Output impedance(SDI)		75Ω
Synchronization mode		Internal synchronization or external synchronization
Eye pattern characteristics		Extra low alignment jitter 0.05UI at HD
Cable equalization		[3G-SDI] up to 90m (300ft) [HD-SDI] up to 150m (500ft) [SD-SDI] up to 300m (1000ft)
Audio extractor support		Support 2ch
PCB stack-up		4-layer board [impedance control — differential 100Ω; single 50Ω]
Input		1x BNC [SDI]
Output		1x HDMI + 1x BNC [SDI] + 1 x 3.5mm
BNC connector		75Ω inter-locked socket
HDMI connector		Type A [19-pin female]
Mechanical		
Housing		
Dimensions [L x W x H]	Model	92 x 84 x 23mm[3.7" x 3.3" x 0.9"]
	Package	198 x 137 x 74mm [7.8" x 5.4" x 2.9"]
	Carton	420 x 400 x 300mm [1'4"x 1'3" x 11.8"]
Weight	Model	175g[6.2 oz]
	Package	390g[13.8 oz]
Power supply		5V 2A DC
Power consumption		2.5 Watts [max]
Operation temperature		0~40°C [32~104°F]
Storage temperature		-20~60°C [-4~140°F]
Relative humidity		20~90% RH [no condensation]

PANEL DESCRIPTION

Front Panel

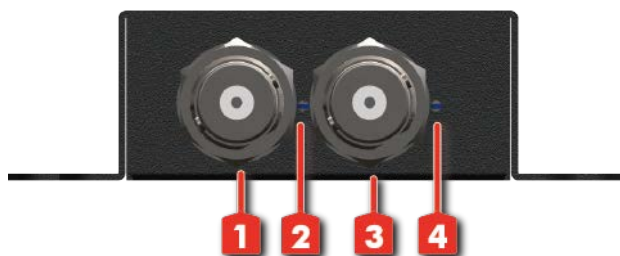

- 1. **SDI IN:** 3G/HD/SD-SDI Input
- 2. **LED:** Power LED indicator
- 3. **SDI OUT:** 3G/HD/SD-SDI loopout
- 4. **LED:** Signal LED indicator


Rear Panel



- 5. **HDMI OUT:** Connect to a HDMI display with a HDMI male-male cable here.
- 6. **Stereo Audio Output**
- 7. **+5V DC:** Connect to a 5V DC power supply.

CONNECTION DIAGRAM

- HDMI
- COAXIAL
- AUDIO

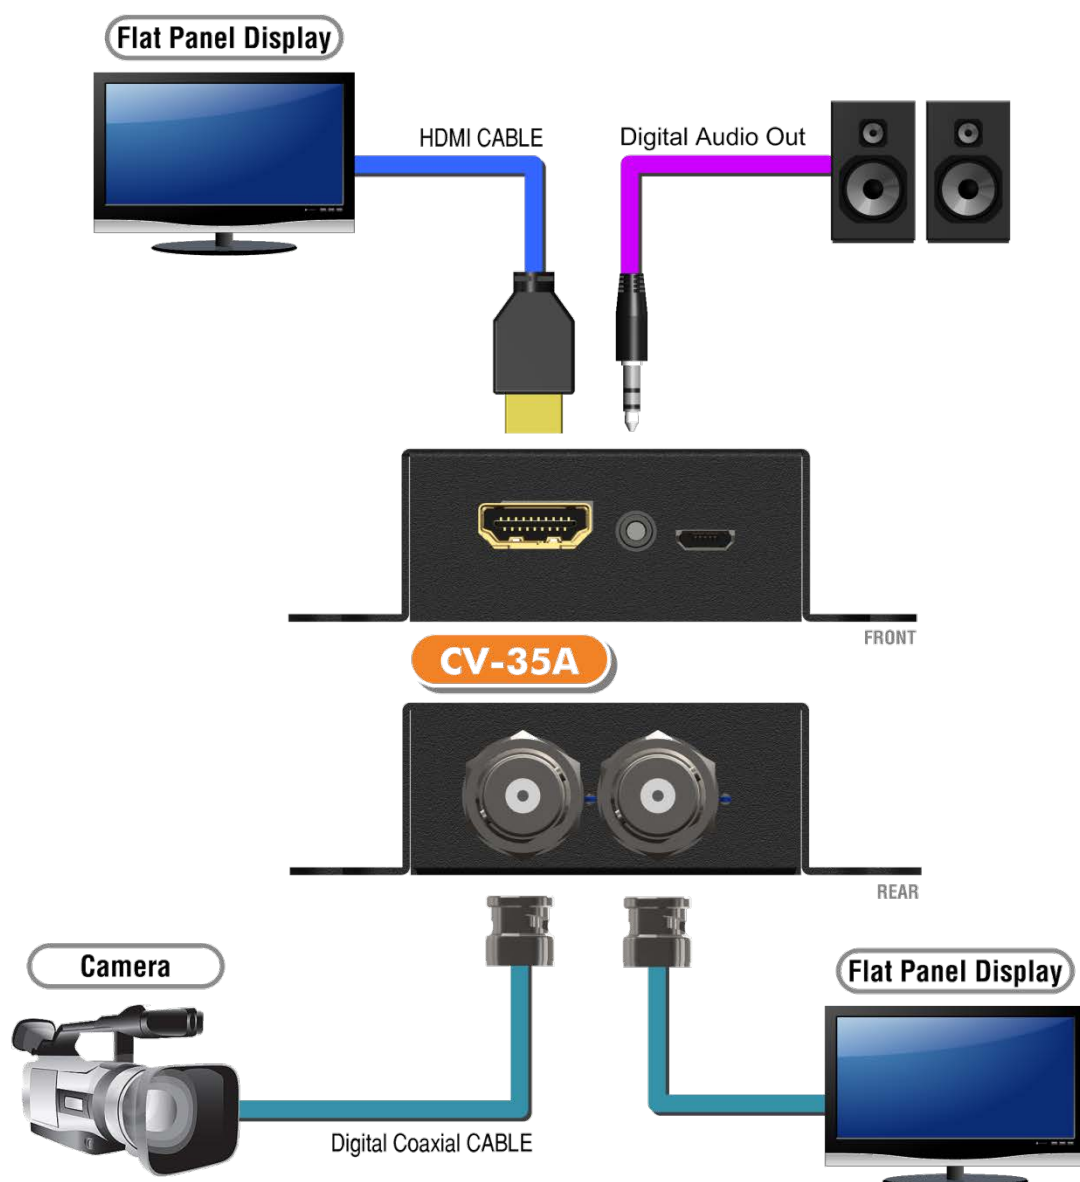

SUPPORTED RESOLUTIONS

3G-SDI Output	
1080p @ 50/ 59.94 / 60Hz	SMPTE 424M, SMPTE 425M
HD-SDI Output	
720p @ 50Hz	SMPTE 296M -3
720p @ 60 / 59.94Hz	SMPTE 296M -1, -2
1080i @ 50Hz	SMPTE 274M -6
1080i @ 60 / 59.94Hz	SMPTE 274M -4, -5
1080p @ 24 / 23.98Hz	SMPTE 274M -10, -11
1080p @ 25Hz	SMPTE 274M -9
1080p @ 30 / 29.97Hz	SMPTE 274M -7, -8
SD-SDI Output	
NTSC	
PAL B,D,G,H,I	

WARRANTY

The SELLER warrants the **CV-35A 3G/HD/SD-SDI to HDMI Converter with Audio Extractor** to be free from defects in the material and workmanship for 1 year from the date of purchase from the SELLER or an authorized dealer. Should this product fail to be in good working order within 1 year warranty period, The SELLER, at its option, repair or replace the unit, provided that the unit has not been subjected to accident, disaster, abuse or any unauthorized modifications including static discharge and power surges.

Unit that fails under conditions other than those covered will be repaired at the current price of parts and labor in effect at the time of repair. Such repairs are warranted for 90 days from the day of reshipment to the BUYER. If the unit is delivered by mail, customers agree to insure the unit or assume the risk of loss or damage in transit. Under no circumstances will a unit be accepted without a return authorization number.

The warranty is in lieu of all other warranties expressed or implied, including without limitations, any other implied warranty or fitness or merchantability for any particular purpose, all of which are expressly disclaimed.

Proof of sale may be required in order to claim warranty. Customers outside Taiwan are responsible for shipping charges to and from the SELLER. Cables are limited to a 30 day warranty and cable must be free from any markings, scratches, and neatly coiled.

The content of this manual has been carefully checked and is believed to be accurate. However, The SELLER assumes no responsibility for any inaccuracies that may be contained in this manual. The SELLER will NOT be liable for direct, indirect, incidental, special, or consequential damages resulting from any defect or omission in this manual, even if advised of the possibility of such damages. **Also, the technical information contained herein regarding the CV-35A features and specifications is subject to change without further notice.**

SIGNAL MEASUREMENT

